


## Printanista Installation Guide

**Download and Installation:** Verify there are no current installations that need to be deleted by navigating to Windows [C:/Program Data](#). If present, delete the ECI DCA folder. Restart your computer or server that hosts the DCA. Download the Printanista DCA software using the unique link sent via email from [dca@rjyoung.com](mailto:dca@rjyoung.com). Select 'Download' and follow the install prompts. (Download>Next>Install>Finish)

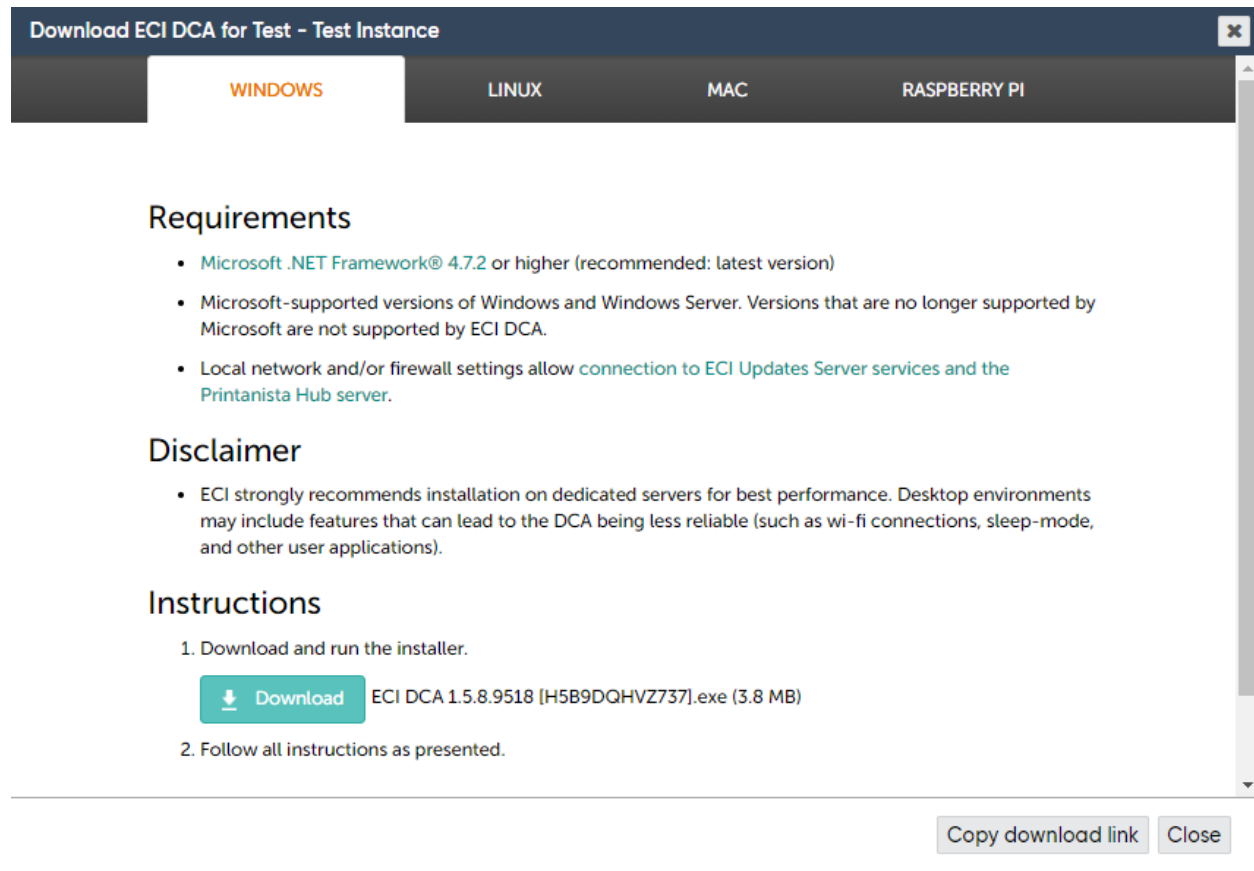

Download ECI DCA for Test - Test Instance

WINDOWS LINUX MAC RASPERRY PI

### Requirements

- Microsoft .NET Framework® 4.7.2 or higher (recommended: latest version)
- Microsoft-supported versions of Windows and Windows Server. Versions that are no longer supported by Microsoft are not supported by ECI DCA.
- Local network and/or firewall settings allow [connection to ECI Updates Server services and the Printanista Hub server](#).

### Disclaimer


- ECI strongly recommends installation on dedicated servers for best performance. Desktop environments may include features that can lead to the DCA being less reliable (such as wi-fi connections, sleep-mode, and other user applications).

### Instructions

1. Download and run the installer.  
[Download](#) ECI DCA 1.5.8.9518 [H5B9DQHVZ737].exe (3.8 MB)
2. Follow all instructions as presented.


Copy download link Close

**Post-Installation Check:** Verify the software connection by accessing the ECI DCA Service Monitor icon in the hidden icons section located in the lower, right corner of your computer.

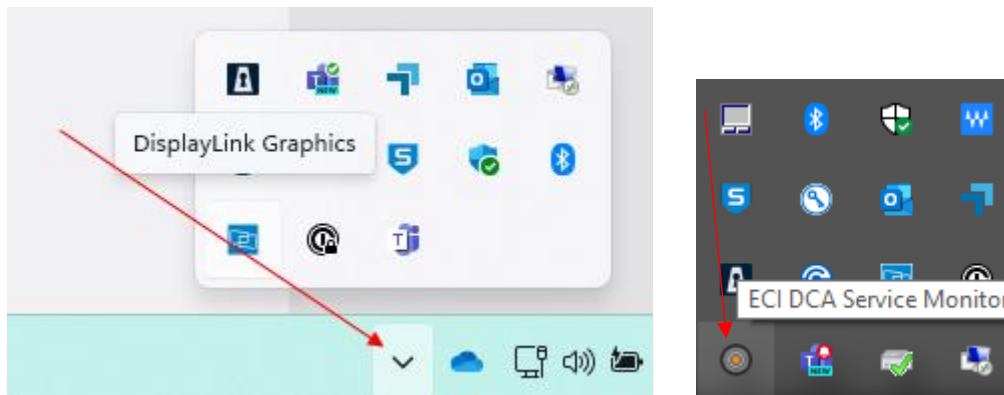

**Configuration:** Sign into Printanista to access your account by selecting Configure DCA.

- Username: your email address
- Temporary Password: Rjyoung

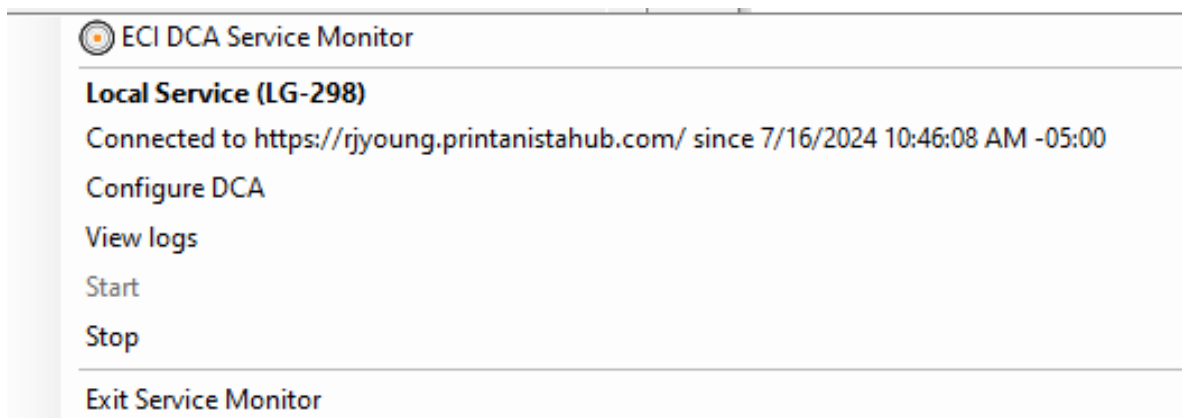

Once signed in, enter any IP ranges and/or IP addresses in the DCA settings under 'Network'. Enter data in the IPv4 box and select 'Save'.

Data Frequency

Network

IPs

Hostnames

Registration

Discovery

SNMP Timeouts

IPv4

192.1.2.3/24  
192.4.5.6/24

IPv6


FF02::1

Credentials

General

MIB Walks

Logs

 Changing between sections will not save the values until the global Save option is selected.

Save


## SNMP v3 Setup for ECI DCA:

Select Account > Installs > Settings > Credentials > SNMP v3 Credentials > Add

Complete information entry:

- Username: Enter the device SNMP v3 username
- Context Name: Enter device Context Name, if available.
- Security: Select Authentication and Privacy
- Label: e.g., HP SNMP v3
- Authentication Type: Select MD5 or SHA (match the SNMP v3 device settings)
- Key & Confirm Key: Enter assigned password
- Privacy Type: Match to device SNMP v3 settings
- Key & Confirm Key: Enter assigned password key

Confirm all entries and select 'Save' to complete the setup.

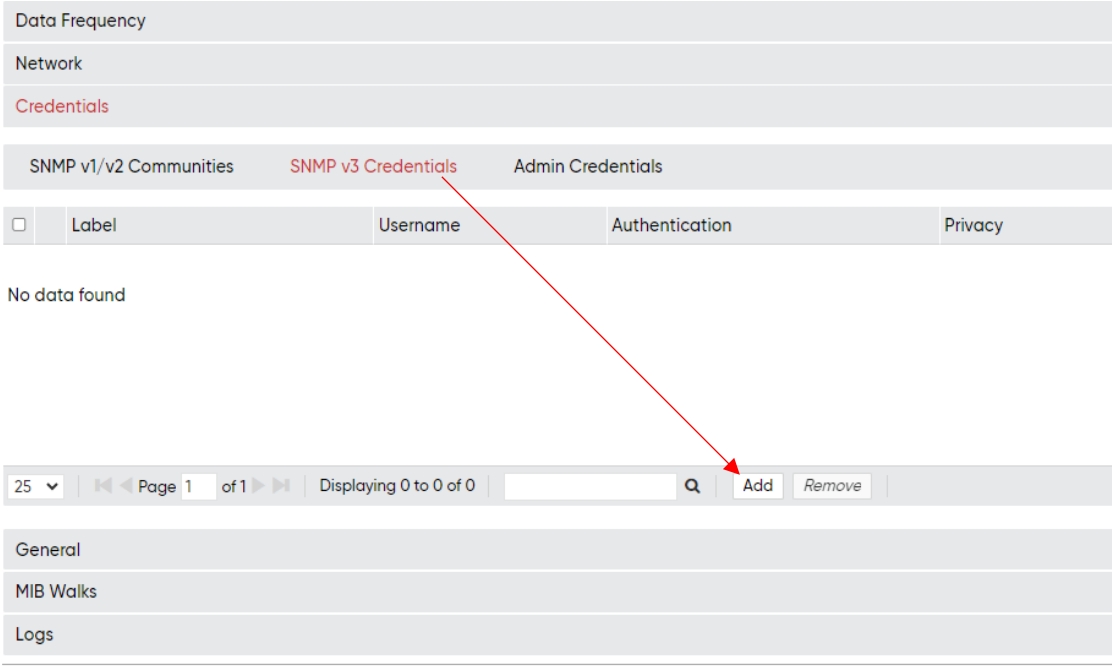

Data Frequency

Network

Credentials

SNMP v1/v2 Communities    **SNMP v3 Credentials**    Admin Credentials

<input type="checkbox"/>	Label	Username	Authentication	Privacy
No data found				

25 ▾ | Page 1 of 1 | Displaying 0 to 0 of 0 |  🔍 | **Add** | Remove

General

MIB Walks

Logs

▲ Changing between sections will not save the values until the global Save option is selected. Save